

19 dB

Technical Sheet


Collections: Marble, Desert, Silva, Infinite, Hybrid, Colourful, Barcode, Cracked Earth, Herringbone, Lustre, Stripes.

2tec2 features excellent performances in quality and durability.

Each collection is crafted with durable and eco-conscious materials ensuring a long life span and heavy commercial use.

2tec2 is available in tiles and rolls, and comes with an Acoustic Comfort Backing reducing walking noise up to 70%.

2tec2. High tech, high design.

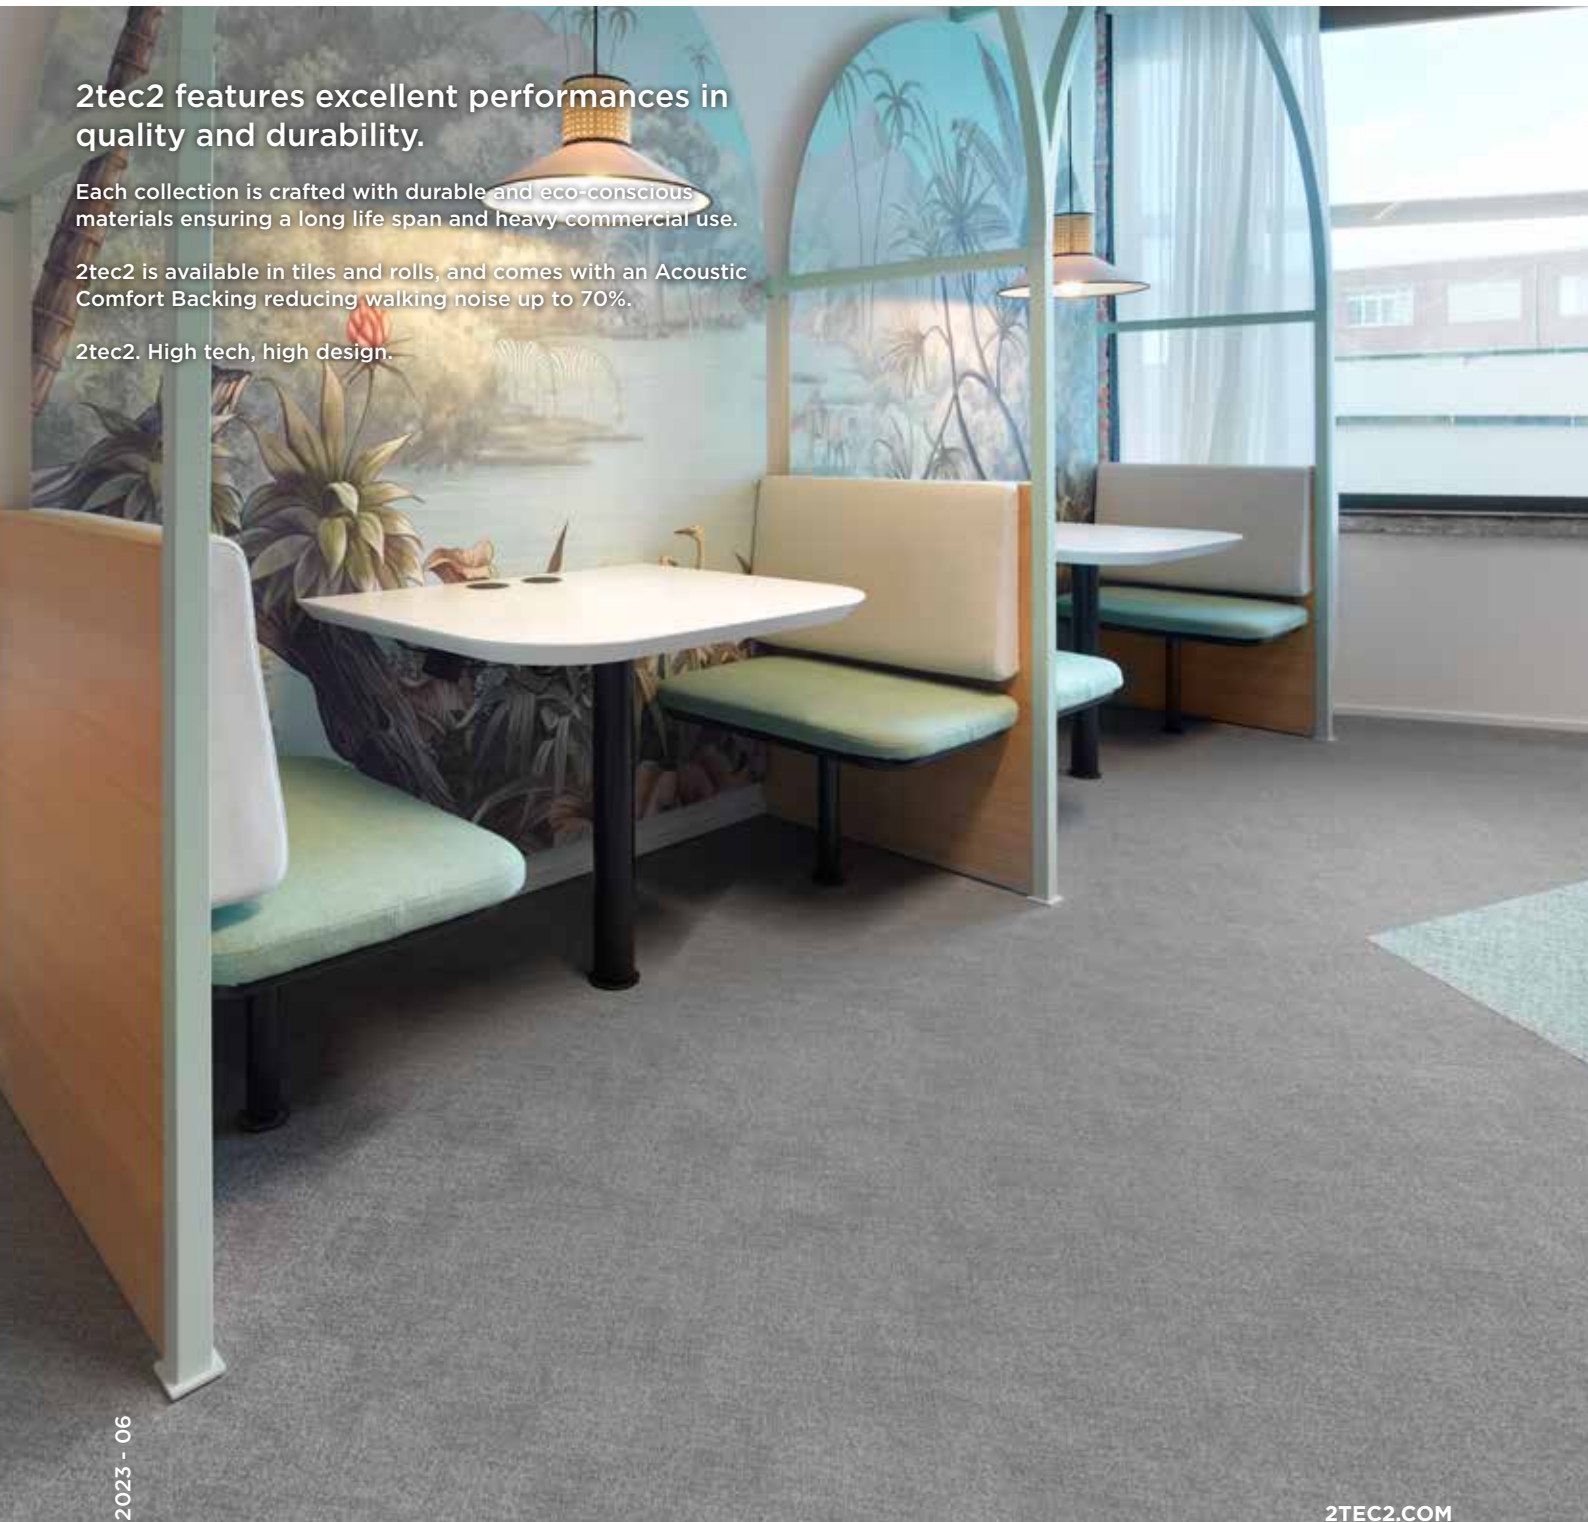

Technical data

Woven Jacquard top layer	900 g/m ² - 26.54 oz/yd ²		Dimensional stability EN 986 - ISO 2551	Meets the requirements
Composition	83% vinyl 7% fiberglass 10% PET		Fungal growth EN 14119-A2	No Growth, Grade 0
Recycled Content	Yes		Foot traffic test ASTM D6119-12	Heavy traffic
Acoustical layer	70% recycled content		Antistatic ISO 6356 AATCC 134-2006	< 2 kV Permanently antistatic
Backing	Vinyl + Felt		Slip resistance EN 13893 ASTM C1028-07 DIN 51130 EN 13036-4	≥ ds 0,85 R9 65
 Total thickness ISO 1765	4,6 mm - 0.18"		Impact sound reduction ISO 10140	19 dB
 Total weight ISO 8543	3200 g/m ² - 94.38 oz/yd ²		Acoustical absorption ISO 354	α _w = 0,15
 Roll width EN ISO 24341	ca. 200 cm - ca. 6'7"		Walking noise reduction EPLF 021029-3	70%
 Roll length EN ISO 24341	ca. 30 m - 32.8 yd		Castor chair suitability EN 985	Continuous use
Plank size (20 pcs per box)	20 x 75 cm - 7.87" x 29.53"		Light fastness ISO 105-B02	8
 Tile size (16 pcs per box) EN 994	50 cm x 50 cm - 19.69" x 19.69"		Thermal resistance ISO 8302	Suitable for underfloor heating
 Resistance to fraying EN ISO 10833	Pass			E1
 Level of Use EN 1307 ASTM D5252	Class 33 Heavy commercial use		Warranty	15 years* *Terms and conditions are available on request
 Reaction to fire EN 13501-1 ASTM E84	B _{fl} -s1 A rating		CE Certificate EN 14041	0493-CPR-0151
Critical radiant flux ASTM E648 NFPA	0,84 W/cm ² Class I		UK CA	8515-CPR-0151
Smoke density ASTM E662	< 300			

Environment & indoor air quality

